

# DH-HAC-HFW1800T/T-A

## 4K Real-time HDCVI IR Bullet Camera



- Max. 4K resolution, real-time video transmission
- CVI/CVBS/AHD/TVI switchable
- Built-in mic (-A)
- Fixed lens (2.8mm; 3.6mm;6mm optional)
- Max. IR length 30m, Smart IR
- IP67, 12V±30%DC



### System Overview

Experience 4K video surveillance with the simplicity of reusing existing coaxial infrastructure. The 4K HDCVI camera adopts a powerful Dahua ISP and advanced 1/2.7" CMOS sensor, which provides superior high quality images. In addition, the camera features broadcastquality audio to provide enhanced supplementary evidence collection. Ultra-high definition and a complete set of features makes the 4K HDCVI camera an ideal choice for mid to large-size businesses and projects where both highly reliable surveillance and construction flexibility are demanded.

### Functions

#### 4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals to be transmitted over 1 coaxial cable simultaneously, i.e. video, audio\*, data and power. Dual-way data transmission allows the HDCVI camera to interact with the HCVR, such as sending control signal or triggering alarm. Moreover, HDCVI technology supports PoC for construction flexibility.

\* Audio input is available for some models of HDCVI cameras.

#### Long Distance Transmission

HDCVI technology guarantees real-time transmission at long distance without any loss. It supports up to 700m transmission for 4K and 4MP HD video via coaxial cable, and up to 300m via UTP cable. \*

\*Actual results verified by real-scene testing in Dahua's test laboratory.

#### Simplicity

HDCVI technology inherits the born feature of simplicity from traditional analog surveillance system, making itself a best choice for investment protection. HDCVI system can seamlessly upgrade the traditional analog system without replacing existing coaxial cabling. The plug and play approach enables full HD video surveillance without the hassle of configuring a network.

#### Broadcast-quality Audio

Audio information is used as supplementary evidence in video surveillance applications. The HDCVI camera supports audio signal transmis-

sion over coaxial cable. In addition, it adopts unique audio processing and transmission technology that best restores source audio and eliminates noise, guaranteeing the quality and effectiveness of collected audio information.

#### Multiple-formats

The camera supports multiple video formats including HDCVI, CVBS, and other two common HD analog formats in the market. This feature makes the camera compatible with not only XVRs, but also most existing HD/SD DVRs. \*

\*Use OSD menu to switch HDCVI to other video formats. Use PFM820 UTC Controller to switch CVBS to HDCVI video format.

#### Protection

The camera's outstanding reliability is unsurpassed due to its rugged design. The camera is protected against water and dust with IP67 ranking, making it suitable for indoor or outdoor environments. Supporting ±30% input voltage tolerance, this camera suits even the most unstable power supply conditions. Its 4KV lightning rating provides protection against the camera and its structure from the effects of lightning.

#### Smart IR

The camera is designed with microcrystalline LED IR illumination for best lowlight performance. Smart IR is a technology to ensure brightness uniformity in B/W image under low illumination. Dahua's unique Smart IR adjusts to the intensity of camera's infrared LEDs to compensate for the distance of an object, and prevents IR LEDs from overexposing images as the object come closer to the camera.

#### 4K Real-time Image Display

Used together with 4K Real-time XVR, the camera can output 4K real-time video stream with clear details and no lag or smear.


Technical Specification					
<b>Camera</b>					
Image Sensor	1/2.7 inch CMOS				
Effective Pixels	3840 (H)× 2160 (V), 4K				
Scanning System	Progressive				
Electronic Shutter Speed	PAL: 1/25s–1/100000s NTSC: 1/30s–1/100000s				
S/N Ratio	>65dB				
Minimum Illumination	0.03Lux/F2.0, 30IRE, 0Lux IR on				
Fill Light Working Distance	30 m (98.4 ft)				
IR On/Off Control	Auto; manual				
IR LED Number	1				
Pan/Tilt/Rotation Range	Pan: 0°–360° Tilt: 0°–90° Rotation: 0°–360°				
<b>Lens</b>					
Lens Type	Fixed-focal				
Mount Type	M12				
Focal Length	2.8mm; 3.6mm;6mm				
Max. Aperture	F2.0				
Angle of View	2.8mm: 125° x 105° x 56° (diagonal x horizontal x vertical) 3.6mm: 104° x 87° x 47° (diagonal x horizontal x vertical) 6mm:62.4° x54.7° x31.3°(diagonal x horizontal x vertical)				
Iris Type	Fixed iris				
Close Focus Distance	2.8mm: 1.0 m (3.3 ft) 3.6mm: 1.9 m (6.2 ft) 6mm:3.6m(11.8ft)				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8mm	74.7 m (245.1 ft)	29.9 m (98.1 ft)	14.9 m (48.9ft)	7.5 m (24.6 ft)
	3.6mm	106.7 m (350.1 ft)	42.7 m (140.1 ft)	21.3 m (69.9 ft)	10.7 m (35.1 ft)
	6mm	160m (524.9 ft)	64 m (210.0ft)	32 m (105.0ft)	16 m (52.5ft)
<b>Video</b>					
Frame Rate	CVI: 4K@25/30fps; 4K@15fps; 5M@20fps; 4M@25fps/30fps; AHD: 4K@15fps; TVI: 4K@15fps; CVBS: 960H				
Resolution	4K (3840 × 2160); 5M (2592 × 1944); 4M (2560 × 1440); 960H (960 × 576/960 × 480)				
Day/Night	Auto switch by ICR				
BLC	BLC/HLC/WDR				
WDR	DWDR				
White Balance	Auto; manual				
Gain Control	Auto; manual				
Noise Reduction	2D NR				
Smart IR	Yes				
Mirror	Off/On				
Privacy Masking	Off/On (8 area, rectangle)				
<b>Certifications</b>					
Certifications	CE (EN55032, EN55024, EN50130-4,EN60950-1) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)				
<b>Port</b>					
Video Output	Video output choices of CVI/TVI/AHD/CVBS by one BNC port				
Audio Input	One channel, built-in mic (-A)				
<b>Power</b>					
Power Supply	12V ±30% DC				
Power Consumption	Max 4.3W (12V DC, IR on)				
<b>Environment</b>					
Operating Temperature	-40°C to +60°C (-40°F to 140°F);<95% (non-condensation)				
Storage Temperature	-40°C to +60°C (-40°F to 140°F);<95% (non-condensation)				
Protection Grade	IP67				
<b>Structure</b>					
Casing	Metal throughout the whole casing				
Camera Dimensions	174.5mm×70.6mm×72.3mm (6.87"×2.78"×2.85")				
Net Weight	0.35Kg (0.77lb)				
Gross Weight	0.45Kg (0.99lb)				

**Ordering Information**



Type	Part Number	Description
4K Camera	DH-HAC-HFW1800TP 2.8mm	4K HDCVI IR Bullet Camera
	DH-HAC-HFW1800TP 3.6mm	
	DH-HAC-HFW1800TP 6mm	
	DH-HAC-HFW1800TN 2.8mm	
	DH-HAC-HFW1800TN 3.6mm	
	DH-HAC-HFW1800TN 6mm	
	DH-HAC-HFW1800TP-A 2.8mm	
	DH-HAC-HFW1800TP-A 3.6mm	
	DH-HAC-HFW1800TP-A 6mm	
	DH-HAC-HFW1800TN-A 2.8mm	
	DH-HAC-HFW1800TN-A 3.6mm	
	DH-HAC-HFW1800TN-A 6mm	
Accessories	PFA134	Water-proof Junction Box
	PFB134+PFA152-E	Water-proof Junction Box+Pole Mount Bracket
	PFM800-4K	Passive Video Balun
	PFM800B-4K	Passive Video Balun
	PFM320D Series	12V 2A Power Adapter
	PFM321D Series	12V 1A Power Adapter
	PFM320D-015	DC12V1.5A Power Adapter



PFM320D-015  
DC12V1.5A Power Adapter

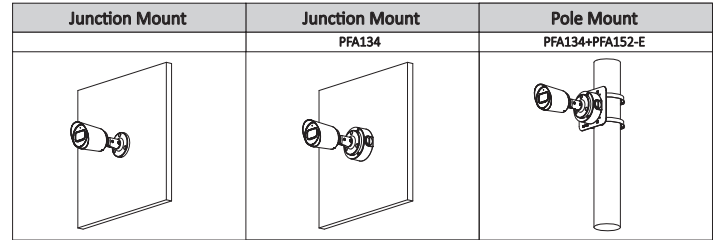

**Dimensions (mm[inch])**

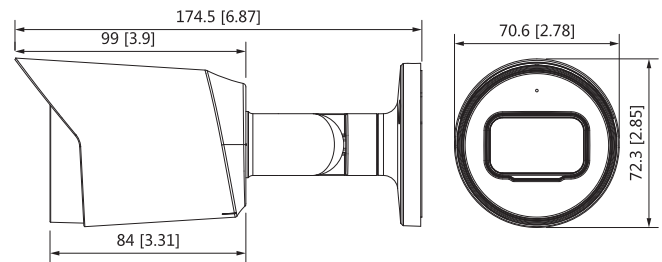

**Accessories**

**Optional:**



PFA134  
Water-proof Junction Box



PFB134+PFA152-E  
Water-proof Junction  
Box+Pole Mount Bracket



PFM800-4K  
Passive Video Balun



PFM800B-4K  
Passive Video Balun



PFM320D Series  
12V 2A Power Adapter



PFM321D Series  
12V 1A Power Adapter